



Hydro-Flow

Commercial Vortex Flow Meters



Model 1200
In-line



Model 3100
Retractable Insertion



Model 2200
Fixed Insertion

Model 2300
Fixed Insertion
*For corrosive fluids,
acids, solvents*



BENEFITS

4 unique models designed to fit specific applications

Superior performance at low cost

Rugged and maintenance-free—no moving parts

Wide flow range – 15:1 turndown; flow rates down to 1 ft/sec (0.30 m/sec)

FEATURES

Microprocessor-based piezo-resistive sensor for accurate and reliable processing

Specifically designed for commercial HVAC, agriculture, and semiconductor water flow applications

Inline and insertion models available


Pulse or 4 to 20 mA Output

Simple design for installation ease

Vortex flow meters have been used in the process industry for more than two decades, and have the ability to measure a wide flow range, with the benefit of a rugged design and no moving parts. The high cost of traditional vortex flow meters had made them impractical for most general water measurement applications. Hydro-Flow draws on over twenty years of experience, creating a new generation of low-cost vortex flow meters specifically designed for commercial HVAC, agriculture, and semiconductor water flow applications.

Superior Technology

The Hydro-Flow Series of vortex flow meters are designed specifically for water flow measurement, containing no moving parts like traditional paddlewheel and impeller-type flow meters. Hydro-Flow features a wide turndown ratio of 15:1, compared to differential pressure flow meters, which have a turndown ratio of only 4:1. Hydro-Flow's unique and proprietary microprocessor-based piezo-resistive vortex sensor can accurately and reliably process vortex signals 25 times smaller than permitted by other technologies, at flow rates as low as 1 foot per second (0.30 meters per second). The result is a flow meter of unequal reliability and performance.

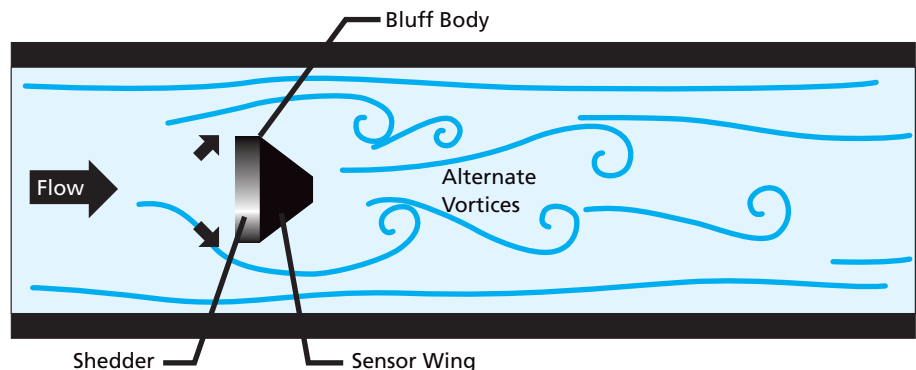

Vortex and the Physical Laws of Flow

As flow passes a bluff body, or obstruction in the flow stream, vortices are alternately formed on either side of the bluff body. According to well-proven physical laws, the frequency at which vortices are alternately formed is directly proportional to the average flow velocity. The vortices create low and high-pressure zones behind the bluff body. A vortex flow meter has a sensing element, which detects these low and high-pressure zones in terms of vortex frequency, and transmits this signal to the vortex flow meter electronics.

Specifications

	Model 1200	Model 2200	Model 2300	Model 3100
Fluids Measured	<ul style="list-style-type: none"> • Water • Water/Glycol Mixtures • Condensate 	<ul style="list-style-type: none"> • Water • Water/Glycol Mixtures • Condensate 	<ul style="list-style-type: none"> • Water • Ultrapure Water • Deionized Water • Acids & Solvents 	<ul style="list-style-type: none"> • Water • Water/Glycol Mixtures • Condensate
Type	Inline	Fixed Insertion	Fixed Insertion	Retractable Insertion
Available Line Sizes	1 to 3" (25 to 76 mm)	2" (51 mm) 3" (76 mm) 4 to 20" (102 to 508 mm)	0.5 to 8" (13 to 203 mm)	3 to 20" (76 to 508 mm)
Mounting Options				
Thread-o-let	N/A	1.5" NPT (38 mm) (4" & larger only) (102 mm & larger only)	N/A	2" NPT (51 mm)
Saddle	N/A	Steel & PVC (3" & larger only) 76 mm & larger only)	N/A	Steel
Tee Fitting	Brass	Brass (2 and 3" only) (51 and 76 mm only)	CPVC, PVC (0.5 to 1.5" only) (13 to 38 mm only)	N/A
Union Tee Fitting	N/A	N/A	PVDF, PP (0.5 to 2" only) (13 to 51 mm only)	N/A
Flange	N/A	N/A	N/A	N/A
Wafer	N/A	N/A	On Request	
Maximum Process Pressure				
Thread-o-let	N/A	400 psi	N/A	400 psi
Saddle	N/A	300 psi	N/A	300 psi
Tee Fitting	150 psi	150 psi	180 psi	N/A
Union Tee Fitting	N/A	N/A	180 psi	N/A
Wafer	N/A	N/A	200 psi	N/A
Process Temperature	32° to 160°F (0° to 71°C)	32° to 160°F (0° to 71°C)	0° to 160°F (-18° to 71°C)	32° to 160°F (0° to 71°C)
Wet Tap Compatible (Install & remove under pressure)	No	No	No	Yes
Pulse Output	Yes	Yes	Yes	Yes
4 to 20 mA Analog Output Option	Yes	Yes	Yes	Yes
Rate/Total Display Option	Yes	Yes	Yes	Yes
No Output, Display Only	Yes	Yes	Yes	Yes

Model 2200 is designed for retrofit use with 1.5" (38 mm) threaded bushing.

Available Options Pulse or 4 to 20 mA Output

All Hydro-Flow Series Models can be connected to a control system, such as a building automation system, PLC, or irrigation controller, with either the standard pulse output or the optional 4 to 20 mA analog output.

BTU-121 Energy Monitoring System

Any Hydro-Flow vortex flow meter can gain accurate BTU flow monitoring with the BTU-121 Energy Monitoring System. The add-on system includes one FP-93 flow monitor, and two RTD temperature sensors (Model TEM). The FP-93 is a microprocessor-based instrument that accurately calculates energy, mass, and volume flow rates for water and other liquids. It accepts two RTD temperature inputs and one frequency flow input. A 4 to 20 mA analog output may be assigned to correspond to energy flow, mass flow, temperature, and other process variables. The thermowell mounted TEM platinum resistance sensors are used to measure the temperature of water and other liquids, producing a highly repeatable and exceptionally stable resistance-versus-temperature relationship. Since the overall accuracy of the BTU/Energy measurement is highly dependent on accurate temperature measurements, each supply and return RTD is provided

with its own specific temperature calibration coefficients. These values are then factory programmed in the FP-93 to produce precise measurement of temperature and BTU/Energy.

Field-Pro Configuration Program

All Hydro-Flow vortex flow meters are configured at the factory with standard settings. The Field-Pro package enables reconfiguration of flow meters in the field, eliminating the need for factory adjustment. This software allows the user to change measuring units and time values, pipe size information, output settings, full-scale flow rates for output signals, and display settings. The Field-Pro Configuration Program is Windows®-compatible, and must be used with the Field-Pro Communicator, a hardware device which provides the interface between a personal computer and the flow meter.

Hydro-Flow Relay Output Module

The Hydro-Flow Solid State Relay Output Module provides a timed pulse duration output to most irrigation controllers requiring a relay contact input, including Motorola® MIR 5000F-MW, Rainbird® Decoder P/N M51200, and other receiving equipment requiring a pulse width longer than 5 milliseconds.

AC to DC Converter/Power Supplies

When only AC power is available, the AC to DC converter and power supply option is recommended.

Watertight Wiring Connections

For watertight wiring connections, options including the Water-Tight Cable Connector, and Direct Burial Cable Lead Wire are available.

Aluminium enclosure

An Aluminum Electronics Enclosure is available for 1200 and 2200 models of the Hydro-Flow. The enclosure is engineered for harsh environments where liquid is present. A local display is not available with the aluminum enclosure. To order the optional aluminum enclosure for the 1200 or 2200 model Hydro-Flow add AL to the end of the model code when ordering.

EMCO is the brand of precision flow meters for liquid, gas, and steam applications, accommodating a wide range of pipe sizes. Field proven for over 40 years, the EMCO product line offers solutions for measurement, including industrial inline vortex, industrial insertion vortex and turbine, and variable area flow products. EMCO products provide a wide range of metering solutions to diverse industries, including the military, hospitals, universities, and many Fortune 500 companies.

Our aim is to provide a metering solution that helps our customers achieve operational improvement through their production capability, usually in the form of reduced energy usage, improved product quality, lower emissions and greater production throughout. Reducing emissions, carbon footprint, and your company's impact on the environment is our goal. Not only will this have a strong social and environmental impact but also a positive economic impact today and well into the future.

EMCO is a trademark of Spirax Sarco, Inc.

For information on EMCO flow products, contact:

EMCO • 2150 Miller Drive Suite H • Longmont, CO 80501

T: 800.356.9362 or 303.682.7060 • F: 303.682.7069 • sales@emcoflow.com • www.emcoflow.com



Printed on recycled paper from sources that have been independently certified for sustainable and well-managed forestry practices.

SPIRAX SARCO, INC.
1150 Northpoint Blvd.
Blythewood, SC 29016
t: 800.883.4411
or: 803.714.2000
f: 803.714.2222
www.spiraxsarco.com/us

spirax
/sarco

© Spirax Sarco, Inc. 2009

All rights reserved. Printed in U.S.A.

SLHF230-04 4/2009